



FormsPro 5002 Optional Front Tractor Installation Guide

⚠ Drivers, User Manuals, and SW Utilities available @ www.printek.com

Preparing the Printer – Select the **Tractor2** parameter with the paper path quick selection feature (see operator's manual *Changing the paper type*), in the Setup menu of the printer (see operator's manual *Setup mode*) or via an application program.

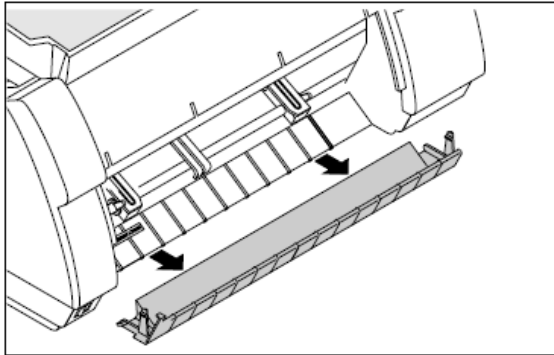


Installing Tractor – Raise the front cover.
Remove the bottom cover.

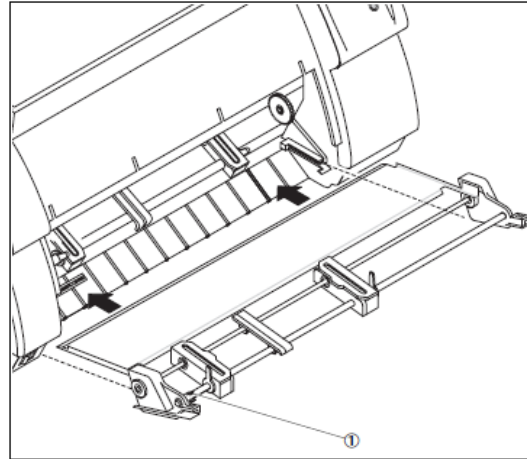

Installation must be performed with the gear on the tractor on the right side.

If your printer is a needle printer, it is necessary to remove the clip ①, which is only used for ink-jet printers.

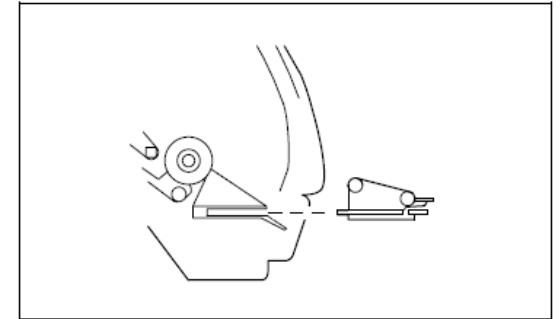

Insert the tractor with the rails on the left and right in parallel to the stop in the guides provided on the printer until they engage.

Note: Loading paper is described in chapter *Loading paper* (operator's manual).

Reinstall the bottom cover and close the front cover.

Note: If you want to insert paper into tractor 1, you have to remove tractor 2 first.