

I-820


Quick Start Guide

This guide provides information on the daily use of the I-820 printer.
For additional information, please refer to the I-820 User Guide.


BEFORE you begin, please visit www.printek.com Support; Downloads; Drivers and Software, to download the I820 printer driver.

Printer features

Paper Door

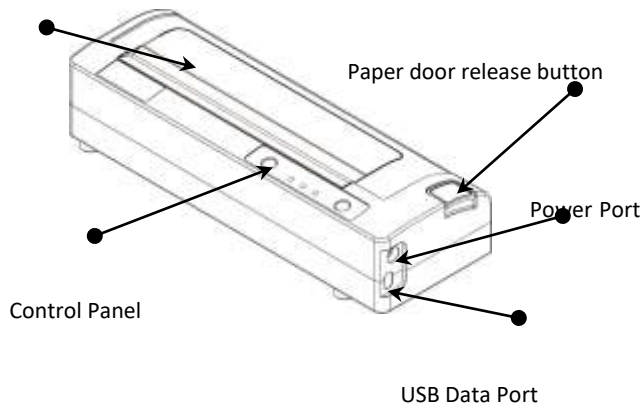

Media (8.5")

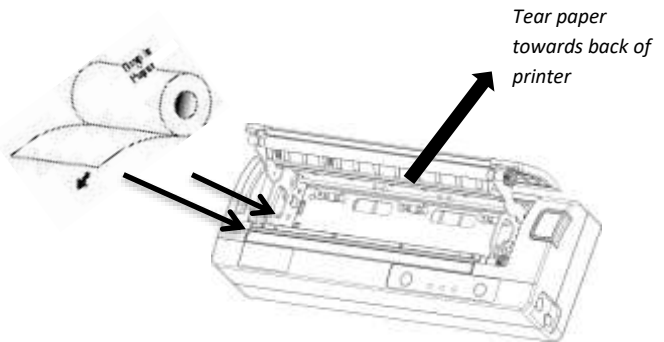

Press Paper door release button to open the paper compartment door. Pull small leader of paper out and close paper door. "Clicks" when properly closed.

Printer with optional battery: Charging


- New batteries are shipped in uncharged state.
- Charge using Printek approved external AC or DC adapter.
- DO NOT charge battery via USB port.
- Charge for minimum of four hours prior to use.

Approximate battery life of 100 pages.

Printer with optional battery: Replacement

Press button to see battery charge level.

4LED	100% charge
3LED	75%
2LED	50%
1LED	25%

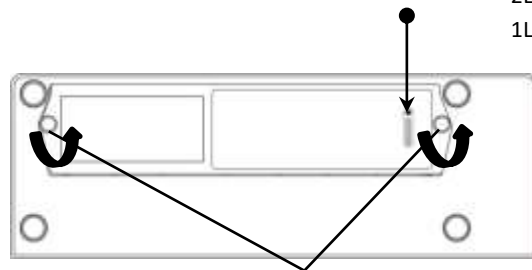






Remove the two screws to

Battery Disposal

Only dispose of used batteries according to your local regulations. If you do not know your local regulations, the Rechargeable Battery Recycling Corporation (RBRC) is a non-profit organization created to promote recycling of rechargeable batteries. For more information visit www.call2recycle.org

I-820 Quick Start Guide

Control Panel indicators

Control Panel			
 Power Button	Power Up Power Down Toggle IP over USB on/off	Press & Release Press & Hold Press twice	
 Paper Feed Button	Advance paper Print Setup Report	Press once (LF) or long (FF) Press twice	
Power & Status (Green/Red) 	Battery (Yellow) 	Alert (Red) 	Indication
On	Off	On	Booting up(… 20 sec!)
On	Off	Off	Ready
On	Off	Flashing	Paper Error/Lid Open
Flashing	Off	Off	Job is arriving
Flashing	Off	Off	Job is printing
Flashing	Off	Flashing	IP over USB active
	On		Charging Battery
	Flashing		Battery Low
Flashing	Flashing	Flashing	Restart the printer manually
Off	Off	Flashing	Restore the printer firmware
Off	Off	On	Print head too hot

Self-Test / Configuration print out



With power on, press the Paper Feed button twice quickly.

Accessing the Configuration Menus through USB

1. Turn the printer ON.
2. Connect a USB cable between the printer and a PC.
3. To access the I-820 web page, push the Power button twice rapidly. This will put the printer into Configuration mode.
4. When the printer is in Configuration mode the POWER and FAULT LEDs will flash together.
 - A. Open browser on your PC and type 169.254.200.1 into the address bar of the browser and hit Enter - A login box should appear:
 - B. Type "0000" and hit Enter- you should now be at the home page for I-820 Configuration.
5. Push the Power button twice rapidly to exit Configuration Mode.



Once the printer is connected via USB and in *IP over USB* mode it is temporarily not possible to access the Internet.